

4Life® Fencing products

APPLICATIONS > Agriculture | Rail | Highway

Product description


Hinge joint stock fencing and mild steel barbed wire manufactured with 4Life® wire which is guaranteed to last at least four times longer than heavily galvanised wire.

- > Conventional hinge joint fencing manufactured to BS EN 10223 – 5 but made from wire guaranteed for even longer life.
- > Designed for the permanent fencing of livestock in hostile and high wear environments such as exposed hill tops and coastal areas.
- > The barbed wire is made to EN10223-1 and compliments the fence to give longer life, lower cost fencing.



GUARANTEE | We guarantee a 4 times longer service life than that of heavily galvanised wires.

4Life®
C8 80 15

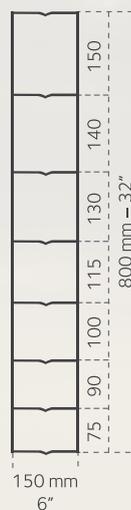

Fencing characteristics

Designation	Height	Vertical Spacing	Length	Nominal Weight	Rolls/pallet
	mm	mm	m	kg	
C8 80 15	800	150	50	32	20

Barbed wire characteristics

Wire Diameter	Length	Number of Barbs	Tensile Strength of line wire	Space between Barbs	Nominal Weight	Number of rolls per Pallet
mm	m		N/mm ²	mm	kg	
2.5	200	4	Min 350	100	22	48


Other patterns, sizes and lengths can be made on request.

Coating

- > 4Life® lasts at least 4 times longer than heavily galvanised wire BS EN 10244-2 Class A.

Mild steel mesh

- > Top & bottom wires Ø 3.00 mm. Min 600 N/mm²
- > Horizontal wires Ø 2.50 mm. Min 600 N/mm²
- > Vertical wires Ø 2.50 mm. Min 350 N/mm²



ArcelorMittal Sheffield,
Vulcan Works,
Birley Vale Close,
Sheffield S12 2DB
Telephone: +44 (0) 114 239 2601
Fax: +44 (0) 114 264 2514



MADE IN SHEFFIELD

www.arcelormittal.com/wiresolutions

All information in this promotional material illustrates products and services in a non final way and invites further technical or commercial explanation. This is not contractual. Copyright ArcelorMittal 2/2019.