

## Dragon high tensile stock fencing

APPLICATIONS > Agriculture | Rail | Highways

## **Product description**

A hinge joint field fence manufactured with OPTIMUM wire, lasting at least five times longer than heavily galvanised wire.

- Coated with zinc, aluminium, magnesium and our green anticorrosion barrier giving enhanced protection.
- A conventional hinge joint field fence manufactured to BS EN 10223-5.
- Designed for ease of pull up when erecting.
- Suitable for the permanent fencing of livestock sheep, cattle, pigs etc.
- A centreless core to provide a snag free, easily rolled out fence where all of the roll can be used.
- A deep crimp between the verticals to aid tensioning over uneven ground, elasticity against livestock and different weather conditions and to allow rainwater to drain away from the joint.
- Available as mild steel or high tensile depending on application.

## Coatings

> OPTIMUM lasts at least five times longer than heavily galvanised wire BS EN 10244-2 Class A.

## Mesh


- > Top & bottom wires Ø 2.50 mm Min 1050 N/mm<sup>2</sup>
- Horizontal wires Ø 2.50 mm Min 1050 N/mm<sup>2</sup>
- > Vertical wires Ø 2.50 mm Min 600 N/mm<sup>2</sup>




GUARANTEE We guarantee a 5 times longer service life than that of heavily galvanised wires.



Characteristics					
Designation	Height	Vertical spacing	Length	Nominal weight	Rolls/ pallet
	mm	mm	m	kg	
HT5 53 15	535	150	100	37	12
HT8 80 22	800	225	100/300	50/150	16/5
HT8 80 30	800	300	100/300	46/138	16/5
HT8 80 15	800	150	100/300	60	12
Other patterns, sizes and lengths can be made on request.					

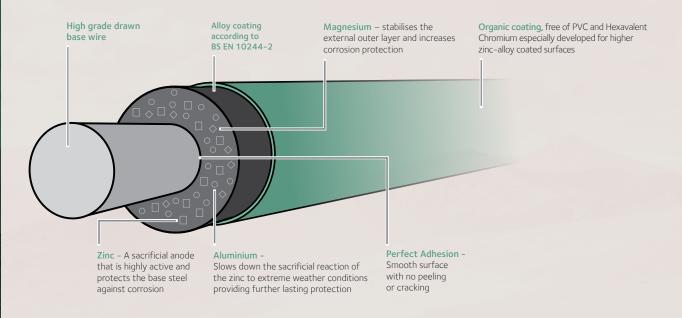

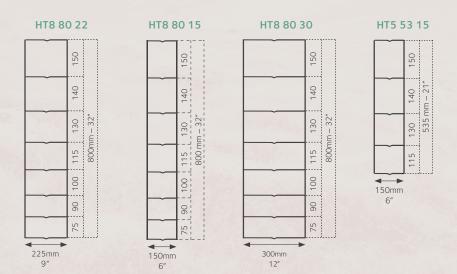

ArcelorMittal Sheffield, Vulcan Works, Birley Vale Close, Sheffield S12 2DB

Telephone: +44 (0) 114 239 2601 Fax: +44 (0) 114 264 2514

MADE IN SHEFFIELD





arcelormittal.sheffield