

# Dragon stock fencing

with **OPTIMUM** technology

APPLICATIONS > Agriculture | Rail | Highways | Pipeline

## Product description

A hinge joint field fence manufactured with OPTIMUM wire, lasting at least five times longer than heavily galvanised wire.

- > Coated with zinc, aluminium, magnesium and our green anti-corrosion barrier giving enhanced protection.
- > A conventional hinge joint field fence manufactured to BS EN 10223-5.
- > Designed for ease of pull up when erecting.
- > Suitable for the permanent fencing of livestock – sheep, cattle, pigs etc.
- > A centreless core to provide a snag free, easily rolled out fence where all of the roll can be used.
- > A deep crimp between the verticals to aid tensioning over uneven ground, elasticity against livestock and different weather conditions and to allow rainwater to drain away from the joint.
- > Available as mild steel or high tensile depending on application.

### Coatings

- > OPTIMUM lasts at least five times longer than heavily galvanised wire BS EN 10244-2 Class A.

### Light Stock Fencing Mesh

- > Top & bottom wires Ø 2.50 mm. Min 600 N/mm<sup>2</sup>
- > Horizontal wires Ø 1.90 mm. Min 600 N/mm<sup>2</sup>
- > Vertical wires Ø 1.90 mm. Min 400 N/mm<sup>2</sup>

### Medium Stock Fencing Mesh


- > Top & bottom wires Ø 3.00 mm. Min 600 N/mm<sup>2</sup>
- > Horizontal wires Ø 2.50 mm. Min 600 N/mm<sup>2</sup>
- > Vertical wires Ø 2.50 mm. Min 350 N/mm<sup>2</sup>

### Heavy Stock Fencing Mesh

- > Top & bottom wires Ø 3.70 mm. Min 550 N/mm<sup>2</sup>
- > Horizontal wires Ø 3.00 mm. Min 600 N/mm<sup>2</sup>
- > Vertical wires Ø 3.00 mm. Min 350 N/mm<sup>2</sup>

# OPTIMUM


**GUARANTEE** | We guarantee a 5 times longer service life than that of heavily galvanised wires.

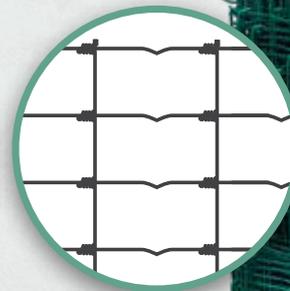

## Characteristics

Designation	Height mm	Vertical spacing mm	Length m	Nominal weight kg	Rolls/ pallet
L5 65 15	650	150	50	14	25
L10 12 15	1180	150	50	24	25
C6 90 15	900	150	50	27	20
C8 80 15	800	150	50/100/250	32	20
C8 80 22	800	225	50/100	27/54	20/16
B8 80 15	800	150	50	46	12


Other patterns, sizes and lengths can be made on request.

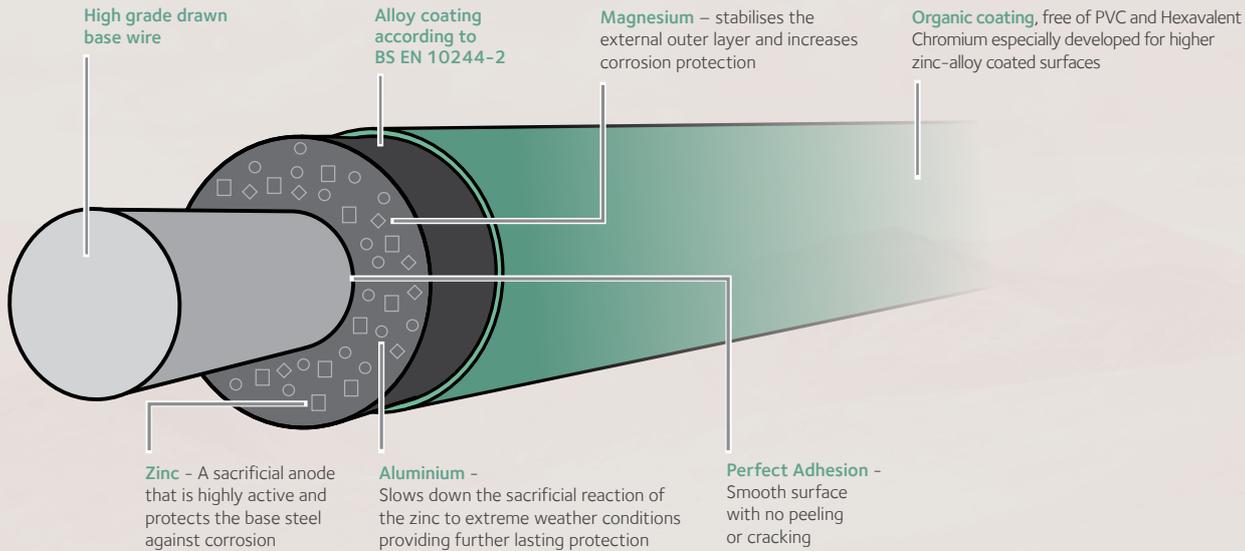


L5 65 15



L10 12 15

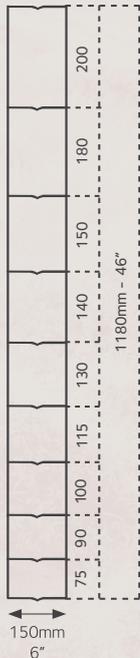


C6 90 15

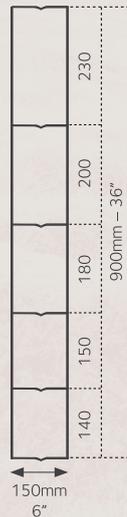

C8 80 15



C8 80 22

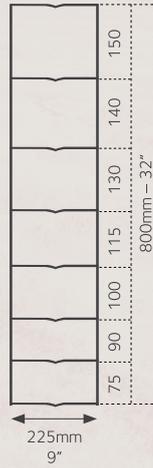

B8 80 15



ArcelorMittal Sheffield,  
Vulcan Works,  
Birley Vale Close,  
Sheffield S12 2DB  
Telephone: +44 (0) 114 239 2601  
Fax: +44 (0) 114 264 2514

[www.arcelormittal.com/wiresolutions](http://www.arcelormittal.com/wiresolutions)



MADE IN SHEFFIELD

Follow us:  [arcelormittal.sheffield](https://www.arcelormittal.com)

All information in this promotional material illustrates products and services in a non final way and invites further technical or commercial explanation. This is not contractual. Copyright ArcelorMittal 2/2019.