



# ArcelorMittal

## Rodeo®Crapal®2

### Barbed wire with Crapal®2 coating

#### Product description

Traditional barbed wire with two or four barbs spaced at 10 cm


- ▶ Crapal®2 coating – Life span 2x longer than EN 10244-2 heavily galvanised wire
- ▶ Supplied with a protective cardboard with carrying handle
- ▶ Product complies with EN 10223-1 standard

#### Application

> Agriculture



### CRAPAL® 2

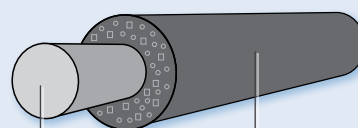


Steel wire

Crapal®2  
Zn+Al

#### Characteristics

Wire Ø (mm)	Length (m)	Number of barbs	Space between barbs (cm)	Weight (kg)	Rolls/pallet
2.2	200	4	10	17.1	48
2.4	200	4	10	19.6	48
2.7	200	4	10	23.5	48
2.7	200	2	10	20.7	60

#### Barb



ArcelorMittal Bissen & Bettembourg  
Route de Finsterthal, L-7703 Bissen  
T +352 835 772, F +352 835 698

[www.arcelormittal.com/wiresolutions](http://www.arcelormittal.com/wiresolutions)

