

# Medium stock fencing

APPLICATIONS > Agriculture | Rail | Highway | Pipeline

## **Product description**

Hinge joint field fence manufactured with 2Life<sup>®</sup> wire which lasts at least two times longer than heavily galvanised wire.

- > A conventional hinge joint field fence manufactured to BS EN 10223-5.
- > Designed for ease of pull up when erecting.
- Suitable for the permanent fencing of livestock sheep, cattle, pigs etc.
- > A centreless core to provide a snag free, easily rolled out fence where all of the roll can be used.
- > A deep crimp between the verticals to aid tensioning over uneven ground, elasticity against livestock and different weather conditions and to allow rainwater to drain away from the joint.
- Different widths to suit your fencing needs: 150 mm 6" gap for strength and rigidity; 300 mm – 12" gap to prevent damage and injury to livestock; 225 mm – 9" for lamb safe fencing.
- > Also available with factory fitted Gripples® on all line wires.

#### Coating

> 2Life<sup>®</sup> lasts at least 2 times longer than heavily galvanised wire BS EN 10244-2 Class A.

#### Mesh

- > Top & bottom wires Ø 3.00 mm. Min 600 N/mm<sup>2</sup>
- > Horizontal wires Ø 2.50 mm. Min 600 N/mm<sup>2</sup>
- > Vertical wires Ø 2.50 mm. Min 350 N/mm<sup>2</sup>




GUARANTEE We guarantee a 2 times longer service life than that of heavily galvanized wires



### Characteristics

Designation	Height	Vertical spacing	Length	Nominal weight	Rolls/ pallet
	mm	mm	m	kg	
C6 90 30	900	300	50/100	21/42	20/16
C7 10 15	1030	150	50	31	20
C8 80 15	800	150	50/100/250	32/64/160	20/12/5
C8 80 22	800	225	50/100	27/54	20/16
C8 80 30	800	300	50	25	20
C8 90 15	900	150	50	33	20
C8 11 30	1145	300	50	26	20
C9 10 15	1000	150	50	36	20
C10 12 15	1180	150	50	41	20

Other patterns, sizes and lengths can be made on request.

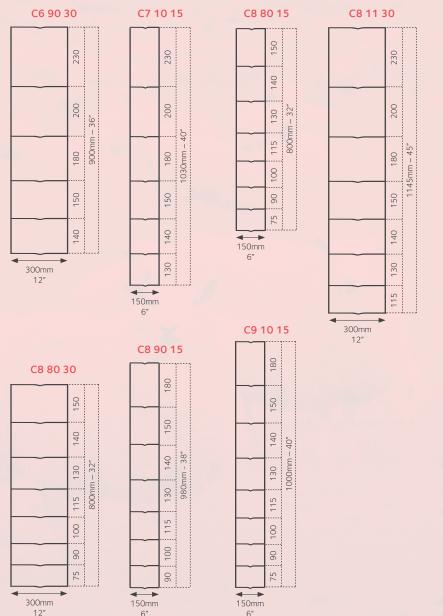

C8 80 22

C10 12 15

200

180

150

140

130

115

100

6


75

--> 150mm

6″

- 46"

1180 mm







ArcelorMittal Sheffield, Vulcan Works, Birley Vale Close, Sheffield S12 2DB Telephone: +44 (0) 114 239 2601 Fax: +44 (0) 114 264 2514

www.arcelormittal.com/wiresolutions



A hard a

All information in this promotional material illustrates products and services in a non final way and invites further technical or commercial explanation. This is not contractual. Copyright ArcelorMittal 2/2019.