

Dragon high tensile stock fencing

APPLICATIONS > Agriculture | Rail | Highways

Product description

Hinge joint field fence manufactured with 2Life® wire which lasts at least two times longer than heavily galvanised wire.

- > Triple coating of zinc, aluminium and our green anti-corrosion barrier giving enhanced protection.
- > A hinge joint field fence manufactured from high tensile wire made to BS EN 10223-5. Designed for ease of pull up when erecting. Suitable for the permanent fencing of livestock - sheep, cattle, pigs etc.
- > A stronger fence needing fewer posts.
- > A centreless core to provide a snag free easily rolled out fence where all of the roll can be used
- > A deep crimp between the verticals to aid tensioning over uneven ground, elasticity against livestock and different weather conditions and to allow rainwater to drain away from the joint.

Coatings

- > 2Life® lasts at least 2 times longer than heavily galvanised wire BS EN 10244-2 Class A



Mesh

- > Top & bottom wires Ø 2.50 mm. Min 1050 N/mm²
- > Horizontal wires Ø 2.50 mm. Min 1050 N/mm²
- > Vertical wires Ø 2.50 mm. Min 600 N/mm²



GUARANTEE | We guarantee a 2 times longer service life than that of heavily galvanised wires*.

HT8 80 15

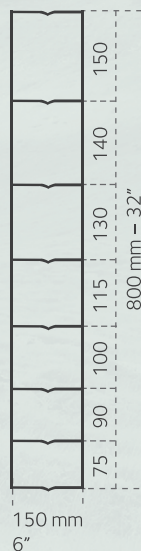

Characteristics

Designation	Height	Vertical spacing	Length	Nominal weight	Number of rolls per pallet
	mm	mm	m	kg	
HT8/80/15	800	150	100/200/300	60/120/180	12/6/4

Other patterns, sizes and heights available on request.

ArcelorMittal Sheffield,
Vulcan Works,
Birley Vale Close,
Sheffield S12 2DB
Telephone: +44 (0) 114 239 2601
Fax: +44 (0) 114 264 2514

