
Distribution Solutions
WireSolutions



Rodeo®Crapal®2 Barbed wire with Crapal®2 coating



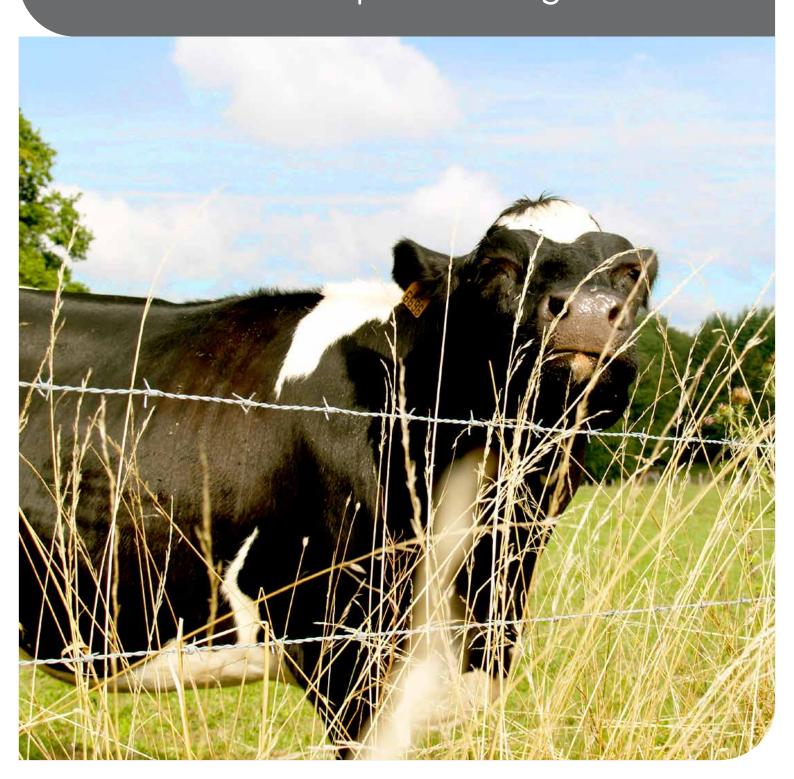

Rodeo®Crapal®2

Barbed wire with Crapal®2 coating

Product description

Traditional barbed wire with two or four barbs spaced at 10 cm

- ► Crapal®2 coating Life span 2x longer than EN 10244-2 heavily galvanised wire
- ▶ Supplied with a protective cardboard with carrying handle
- ▶ Product complies with EN 10223-1 standard





Application

► Agriculture






Characteristics

Wire Ø (mm)	Length (m)	Number of barbs	Space between barbs (cm)	Weight (kg)	Rolls/pallet
2.2	100	4	10	8.5	80
2.4	100	4	10	9.8	80
2.7	100	4	10	11.7	80
2.2	200	4	10	17.1	48
2.4	200	4	10	19.6	48
2.7	200	4	10	23.5	48
2.7	200	2	10	20.7	60

Barb



ArcelorMittal Bissen & Bettembourg Route de Finsterthal, L-7703 Bissen T+352 835 772, F+352 835 698





