

Light high tensile stock fencing

APPLICATIONS > Agriculture | Medium Term Projects

Product description

Hinge joint field fence manufactured with 2Life® wire which lasts at least 2 times longer than heavily galvanised wire.

- > A light weight, high tensile conventional hinge joint field fence manufactured to BS EN 10223-5.
- > Suitable for lambs, small livestock or as an economic fence for short to medium term projects.
- > A centreless core to provide snag free, easily rolled out fence where all of the roll can be used.
- > A deep crimp between verticals to aid tensioning over uneven ground, elasticity against livestock and different weather conditions and to allow rainwater to drain away from the joint.

Coating


- > 2Life® lasts at least two times longer than heavily galvanised wire BS EN 10244-2 Class A.

Mesh

- > Top and bottom wires Ø 2.00 mm. Min 1050 N/mm²
- > Horizontal wires Ø 2.00 mm. Min 1050 N/mm²
- > Vertical wires Ø 2.00 mm. Min 600 N/mm²



GUARANTEE | We guarantee a 2 times longer service life than that of heavily galvanised wires.




Characteristics


Pattern	Height	Vertical Spacing	Length	Nominal Weight	Rolls/pallet
	mm	mm	m	kg	
LHT6/90/15	900	150	100	32	20
LHT8/80/15	800	150	100	37	16
LHT8/90/22	900	225	100	33	16

Other patterns, sizes and lengths can be made on request.


LHT6 90 15

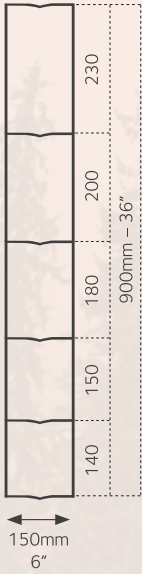

LHT8 80 15

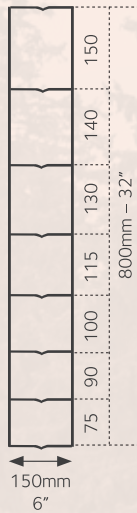

LHT8 90 22

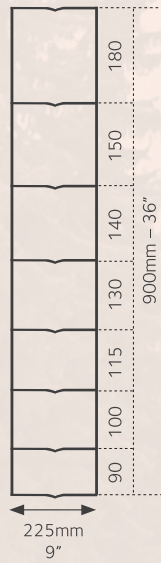

ArcelorMittal Sheffield,
Vulcan Works,
Birley Vale Close,
Sheffield S12 2DB
Telephone: +44 (0) 114 239 2601
Fax: +44 (0) 114 264 2514

www.arcelormittal.com/wiresolutions



MADE IN SHEFFIELD



All information in this promotional material illustrates products and services in a non final way and invites further technical or commercial explanation. This is not contractual. Copyright ArcelorMittal 2/2019.